## RULLI DI PVC E PVC-ACCIAIO MOTORIZZATI CON PULEGGIA PER CINGHIA PIANA

Sono costituiti da rulli base Serie 553.0 con tubo di PVC oppure Serie 563.0 con tubo d'acciaio e da una puleggia di poliammide PA, collegati tra loro ad una estremità del mantello mediante un sistema ad incastro particolarmente robusto ed efficace.
La lunghezza dei trasportatori motorizzati con rulli Serie 753.26 e Serie 763.26 è definita dalla potenza trasmissibile dalla cinghia di trascinamento e dalla capacità di carico dei relativi rulli base.
Su richiesta: tubo di PVC speciale e d'acciaio inox, asse d'acciaio inox, cuscinetti radiali a sfere tipo 6202 d'acciaio e d'acciaio inox.
Temperatura d'esercizio normale TN: –5 ÷ +50 [°C].

## *MOTOR-DRIVEN PVC AND PVC-STEEL ROLLERS WITH PULLEY FOR FLAT BELT*

*These are made using standard series 553.0 rollers with PVC tubes, or standard series 563.0 rollers with steel tubes, and a polyamide PA resin pulley, connected at one end by a particularly secure and effective clamping system.*

*The length of conveyors with series 753.26 and 763.26 rollers depends on the power which can be transmitted by the belt and the load capacities of the basic rollers.*

*If required: special PVC and, stainless steel tube, stainless steel shaft, 6202 type radial ball-bearings in steel or stainless steel.*

*Standard operating temperature TN: –5 ÷ +50 [°C].*

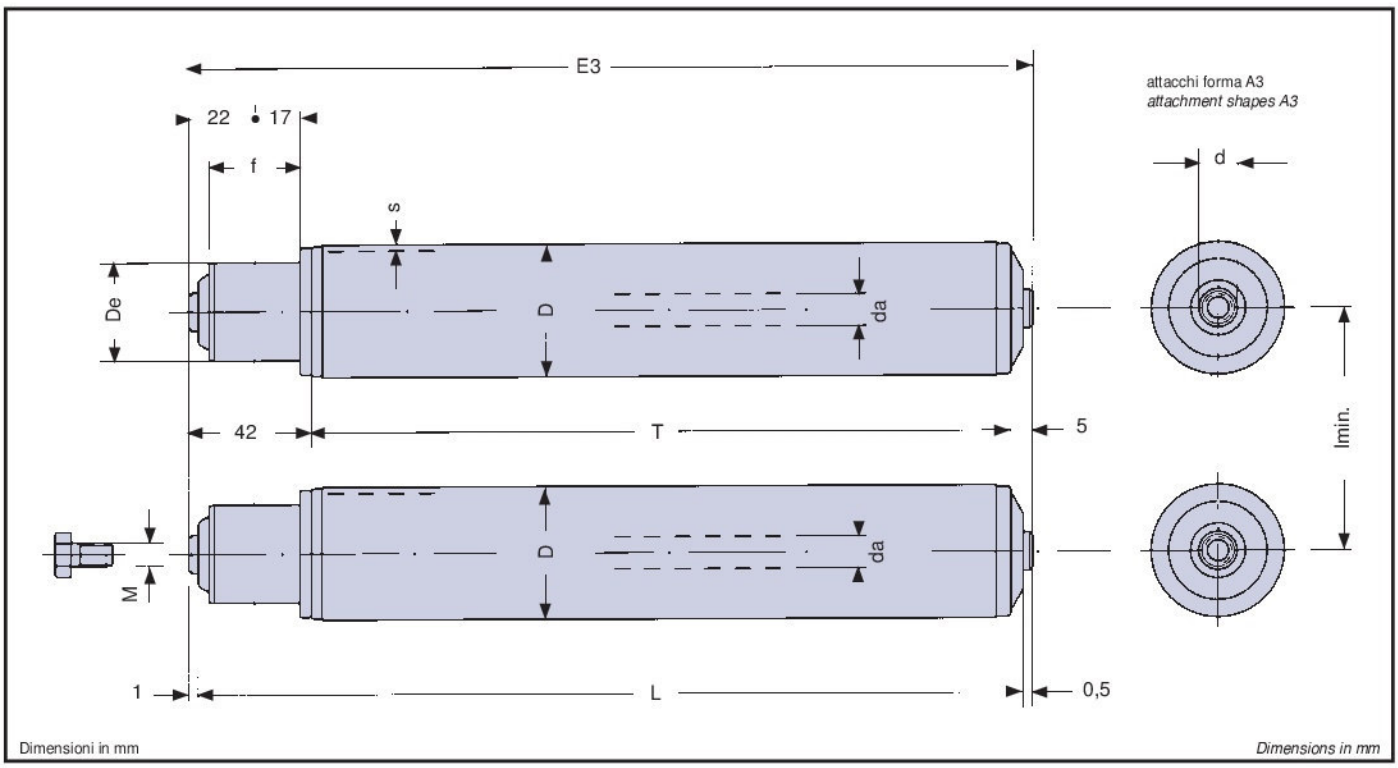


Dimensioni in mm — *Dimensions in mm*

Tabella 87 — Table 87

**RULLI DI PVC E PVC-ACCIAIO MOTORIZZATI CON PULEGGIA PER CINGHIA PIANA**
***MOTOR-DRIVEN PVC AND PVC-STEEL ROLLERS WITH PULLEY FOR FLAT BELT***

| tipo *type* | tubo *tube* | | | L | E3 | puleggia piana *flat pulley* | | | | rullo base *basic roller* | | | | peso totale rullo kg *total roller weight kg* | | peso parti rotanti kg *weight of rotary parts kg* | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | D | s | materiale *material* | | | De | f | lmin. | materiale *material* | tipo *type* | d | da | M | L = 200 | oltre, al cm *plus per cm* | L = 200 | oltre, al cm *plus per cm* |
| **753.26.51.120.8** | 50 | 2,8 | PVC | T+45,5 | T+47 | 37 | 34 | 55 | PA | **553.0.120.8** | 12 | 12 | 8 | 0,5395 | 0,0150 | 0,2493 | 0,0062 |
| **753.26.51.140.8** | | | | | | | | | | **553.0.140.8** | 14 | 14 | 8-10 | 0,6211 | 0,0182 | 0,2493 | 0,0062 |
| **753.26.51.120.25** | 63 | 3,0 | | | | | | 68 | | **553.0.120.25** | 12 | 12 | 8 | 0,6361 | 0,0174 | 0,3459 | 0,0086 |
| **753.26.51.140.25** | | | | | | | | | | **553.0.140.25** | 14 | 14 | 8-10 | 0,7177 | 0,0206 | 0,3459 | 0,0086 |
| **763.26.51.120.8** | 50 | 1,5 | ACC | | | | | 55 | | **563.0.120.8** | 12 | 12 | 8 | 0,7763 | 0,0267 | 0,4688 | 0,0179 |
| **763.26.51.140.8** | | | | | | | | | | **563.0.140.8** | 14 | 14 | 8-10 | 0,8579 | 0,0299 | 0,4688 | 0,0179 |
| **763.26.51.120.25** | 60 | | | | | | | 65 | | **563.0.120.9** | 12 | 12 | 8 | 0,8836 | 0,0304 | 0,5933 | 0,0216 |
| **763.26.51.140.25** | | | | | | | | | | **563.0.140.9** | 14 | 14 | 8-10 | 09651 | 0,0336 | 0,5933 | 0,0216 |